





# HANSADESIGNO STYLE

INSTALLATION AND MAINTENANCE GUIDE











### 5183 2293



EN 817  
50 - 1000 kPa  
0.10 l/s (300 kPa w/Controller)  
max. +80°C

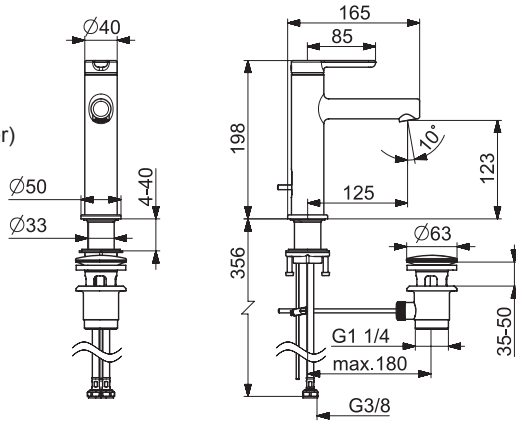

[static.hansa.com/51832293](http://static.hansa.com/51832293)

### 5188 2293



EN 817  
50 - 1000 kPa  
0.10 l/s (300 kPa w/Controller)  
max. +80°C

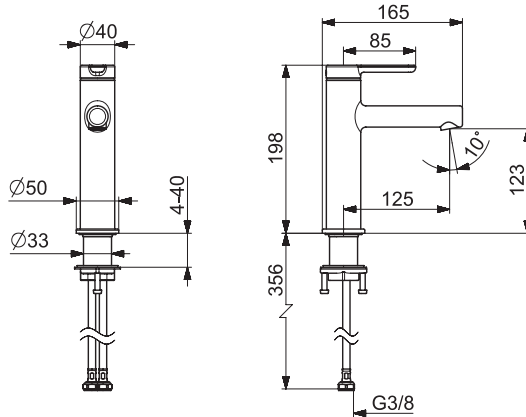

[static.hansa.com/51882293](http://static.hansa.com/51882293)

### 5169 2293

EN 817  
50 - 1000 kPa  
0.10 l/s (300 kPa w/Controller)  
max. +80°C


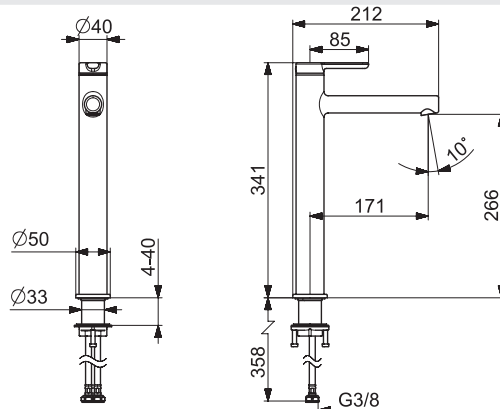


[static.hansa.com/51692293](http://static.hansa.com/51692293)



**5149 2293**



EN 817  
 50 - 1000 kPa  
 0.10 l/s (300 kPa w/Controller)  
 max. +80°C

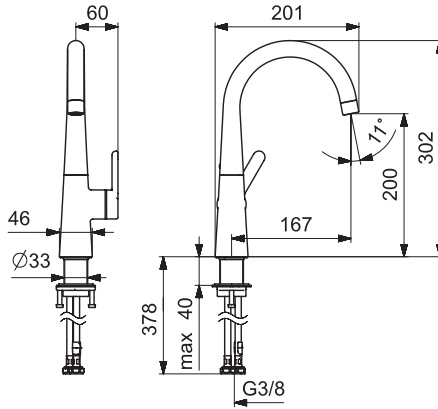





[static.hansa.com/51492293](http://static.hansa.com/51492293)

**5103 2293**

EN 817  
 50 - 1000 kPa  
 0.10 l/s (300 kPa w/Controller)  
 max. +80°C

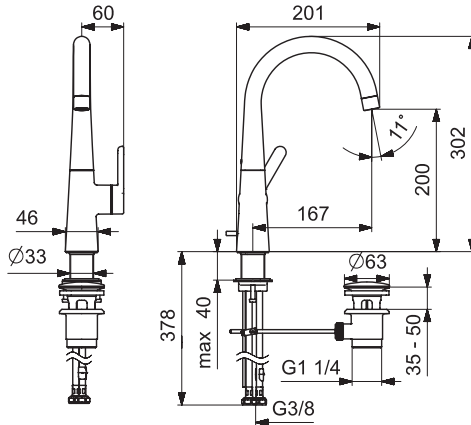


[static.hansa.com/51032293](http://static.hansa.com/51032293)




max.  
1600 kPa

**1**

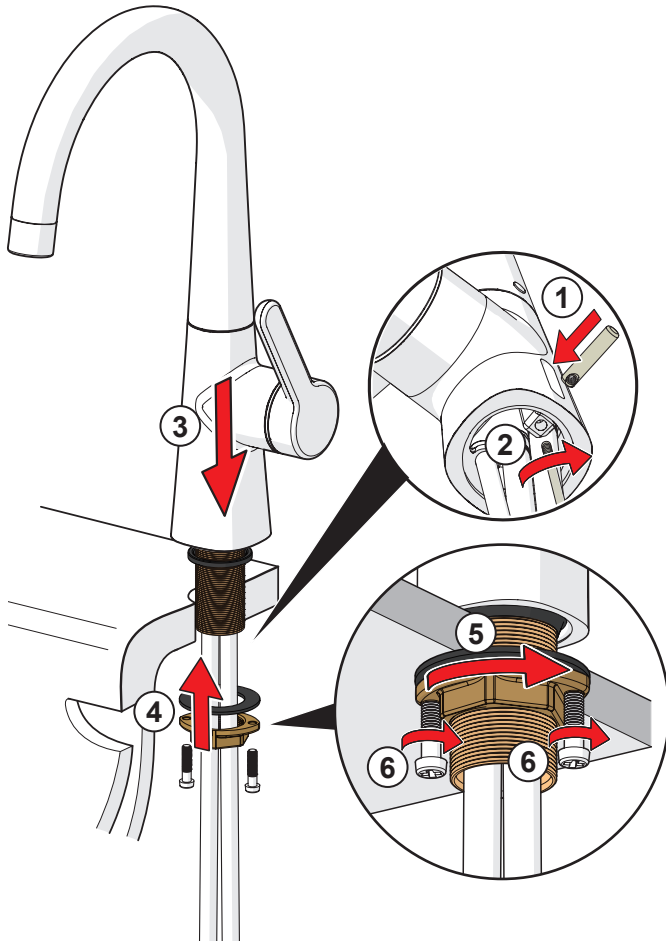






①




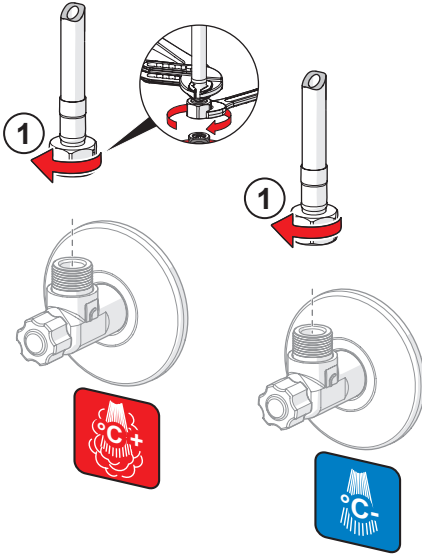


max.  
1600 kPa




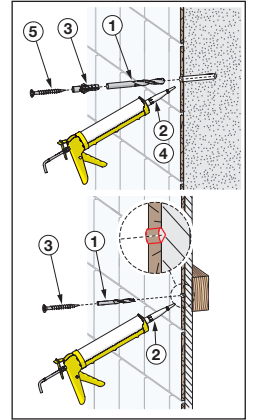







① ② ③

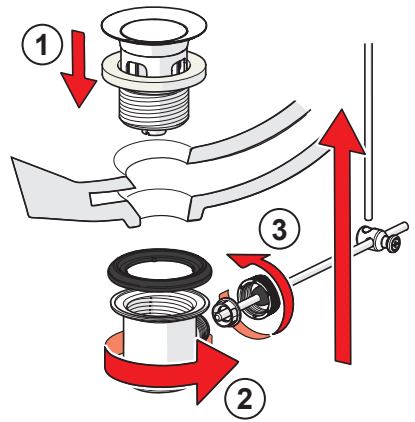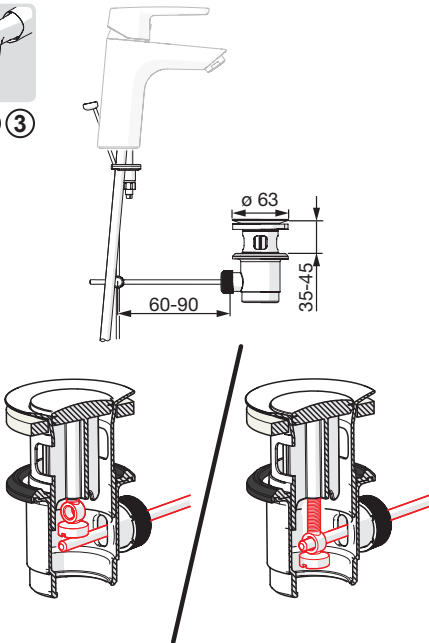

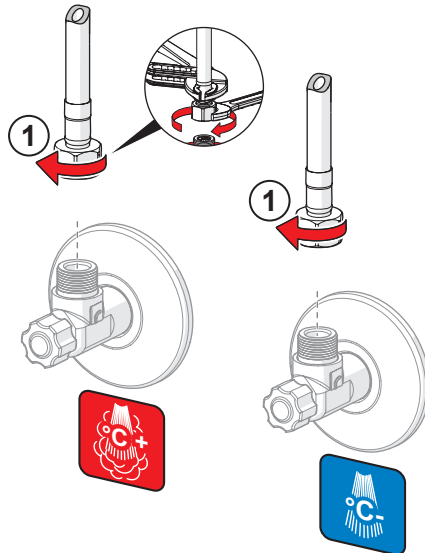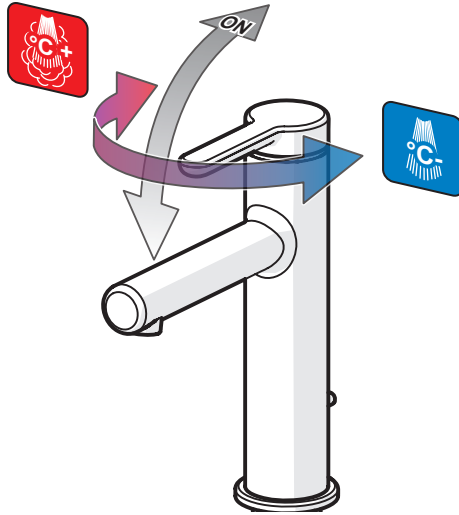




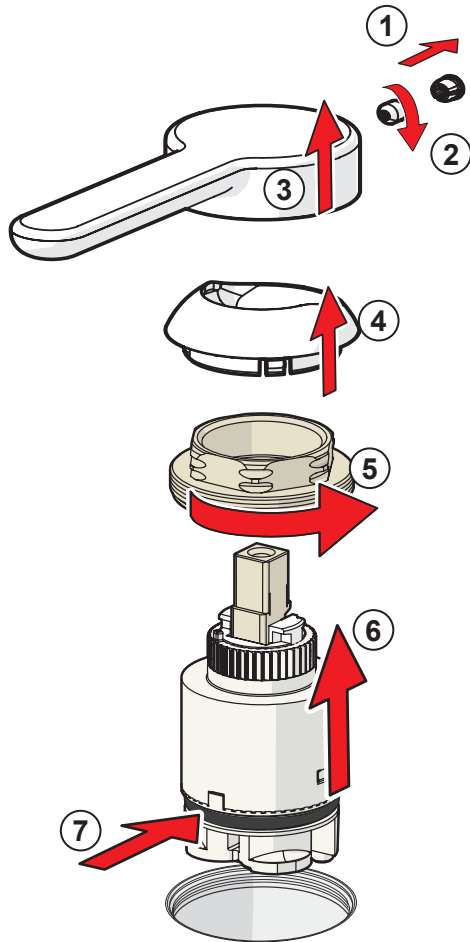




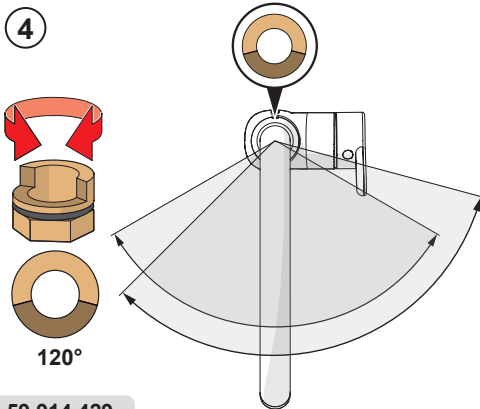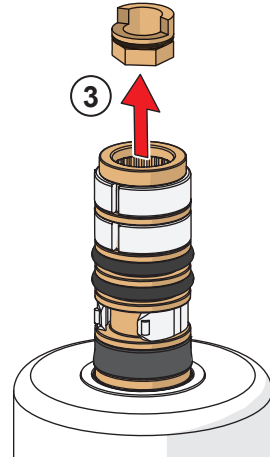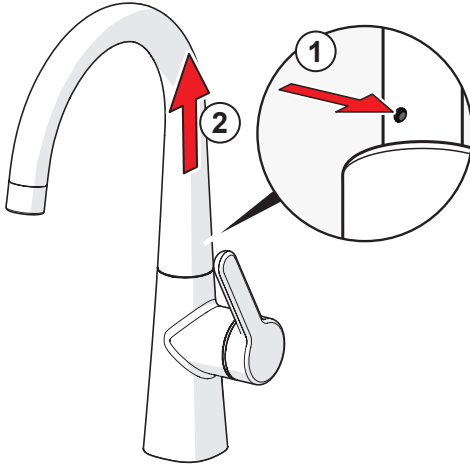

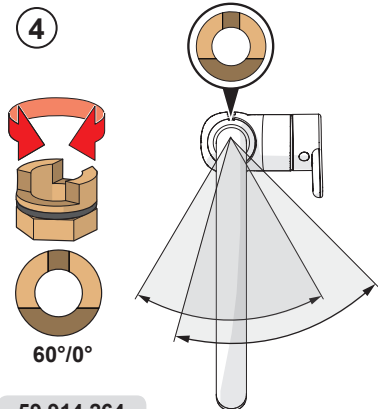






59 914 429

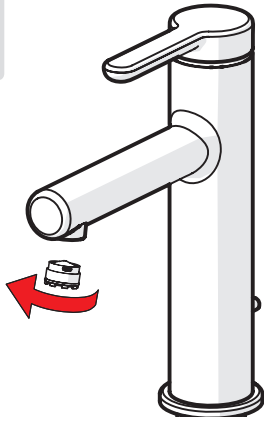

59 914 264

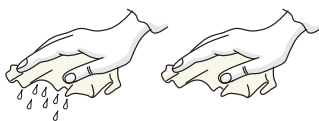


  <b>PH 6-9</b>	
 	 <b>ALCOHOL</b> 




[CLEANING.HANSA.COM](http://CLEANING.HANSA.COM)

**5169 2293**

- 1 59 914 637
- 2 59 913 762
- 3 59 904 755
- 4 59 914 638
- 5 59 913 958
- 6 59 913 914
- 7 59 914 645
- 8 59 913 366
- 9 59 914 650
- 10 59 913 371
- 11 59 914 289

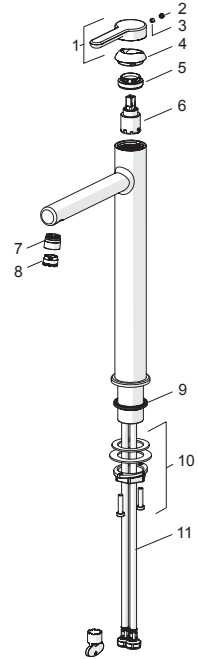**5188 2293 , 5183 2293**

- 1 59 914 637
- 2 59 913 762
- 3 59 904 755
- 4 59 914 638
- 5 59 913 958
- 6 59 913 914
- 7 59 914 645
- 8 59 913 366
- 9 59 914 650
- 10 59 913 371
- 11 59 914 468

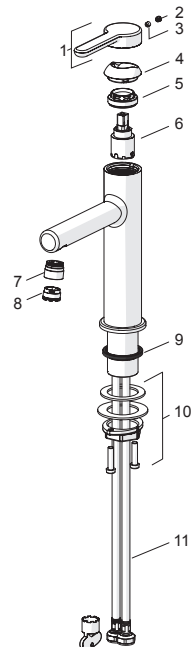




**5149 2293, 5103 2293**

- 1 59 914 428
- 2 10 074 25V
- 3 59 913 762
- 4 59 914 264
- 4 59 914 429
- 5 59 914 431
- 6 59 914 640
- 7 59 904 755
- 8 59 914 638
- 9 59 913 958
- 10 59 913 914
- 11 59 914 650
- 12 59 913 371
- 13 59 914 466

60°/0°  
120°

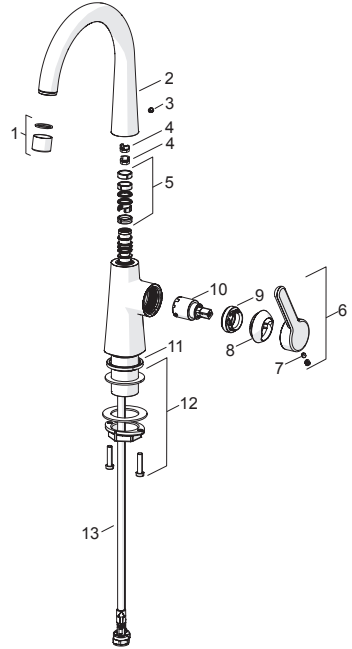





Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands, Oras and Hansa.

The head office of the Group is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1400 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

HANSA Armaturen GmbH  
P. O. BOX 81 02 40  
D-70519 Stuttgart

Sigmaringer Strasse 107  
D-70567 Stuttgart  
Tel.: +49 711 16 14 0  
Fax: +49 711 16 14 368  
info@hansa.de

[www.hansa.com](http://www.hansa.com)



a member of  orasgroup